

Type SSV

Spoon sampling valve



for free falling granulates, powders
and non-sticky pastes

$V_{P\ min}$ 50 ml up to 1000 ml per stroke

- representative sample
- safe and simple operation
- FDA compliant



PN — Class —
Temperature: -40 bis 250°C
Ventilation to atmosphere

Design characteristics


- easy installation
- representative sample, defined volume
- welding connection
- installation position 90°
- material: stainless steel 1.4308, ASTM A341 CF8

Options


- other materials
- other lab bottle adapter
- sampling volume: 100 ml, 250 ml and 1000 ml
- other sampling lancee

Functionality

advance spoon lance

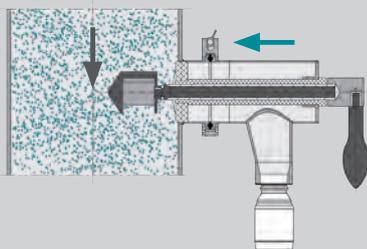

filling

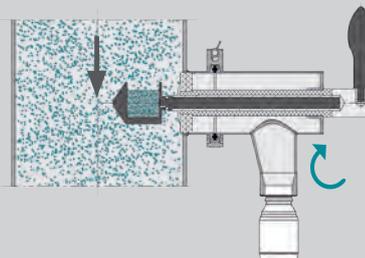

sampling drawing and resting position

