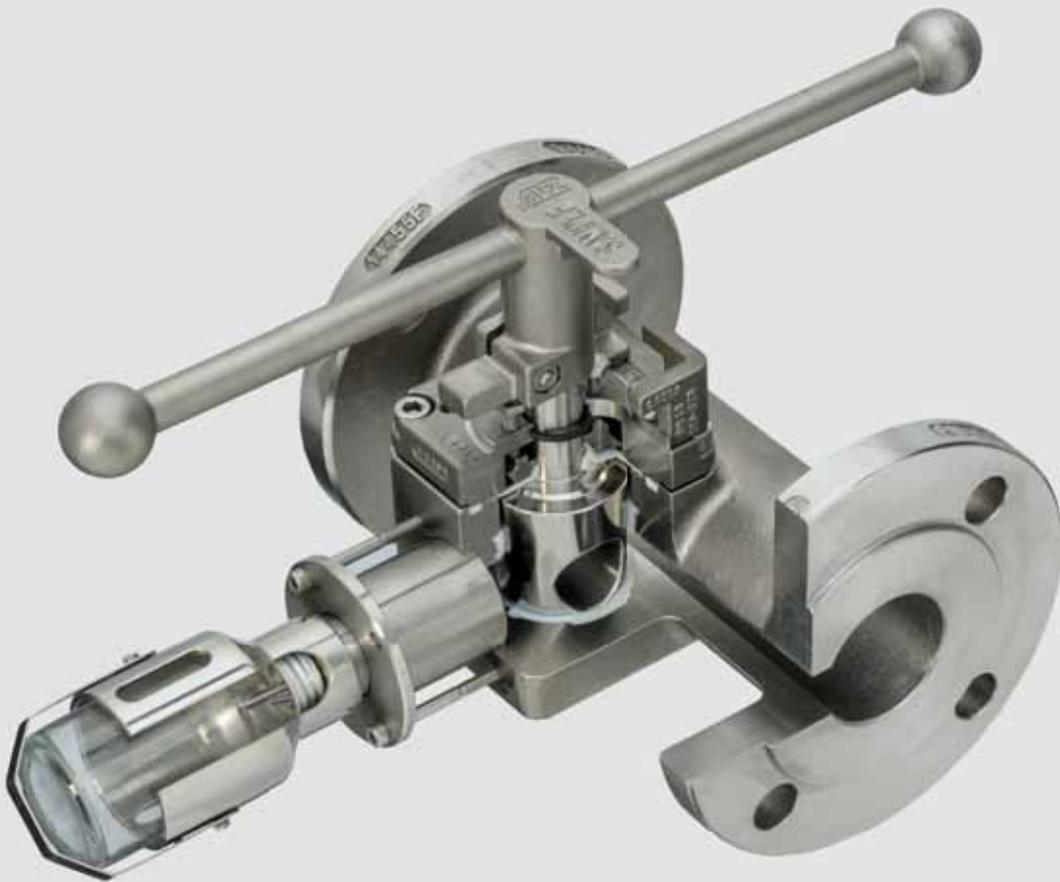


**Type CONTIFLOW**  
Sampling plug valves



# Type CONTIFLOW

## Sample drawing without flow interruption



for liquids and solids-containing media

Sampling volume / operation:



$V_{P \min}$  25 ml /  $V_{P \max}$  100 ml


Bottle volume:  $V_{F \min}$  50 ml /  $V_{F \max}$  2000 ml

- safe and simple operation
- emission-free
- piggable

DN 15 - 200 / PN 10 - 40

NPS 1/2 - 8 / Class 150 - 300

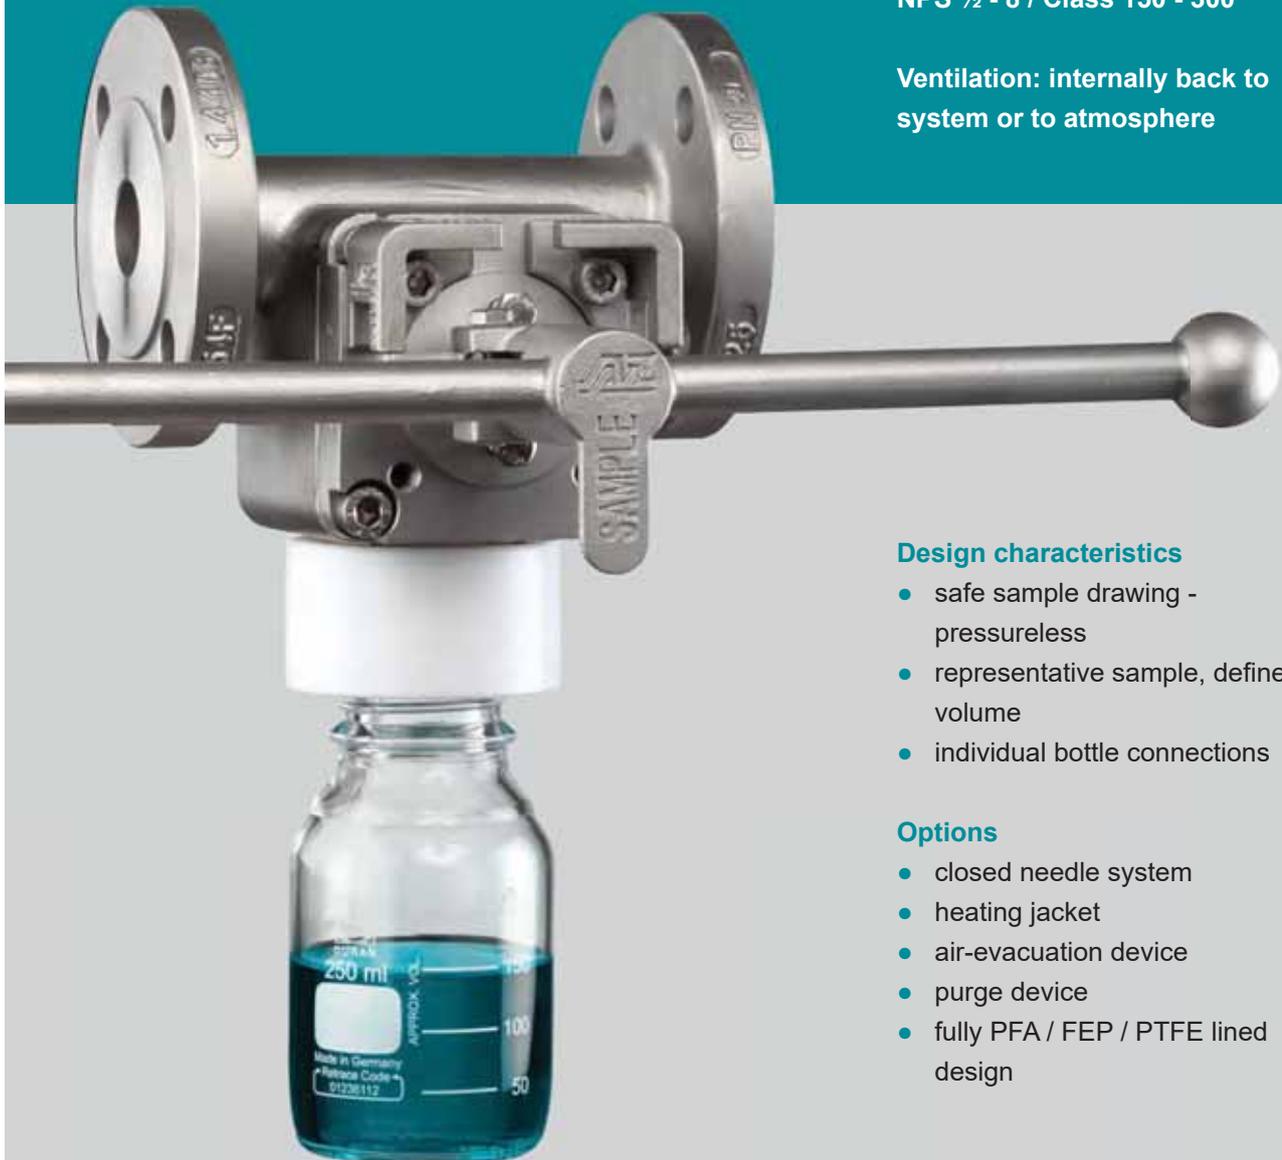Ventilation: internally back to system or to atmosphere



### Design characteristics

- safe sample drawing - pressureless
- representative sample, defined volume
- individual bottle connections

### Options

- closed needle system
- heating jacket
- air-evacuation device
- purge device
- fully PFA / FEP / PTFE lined design

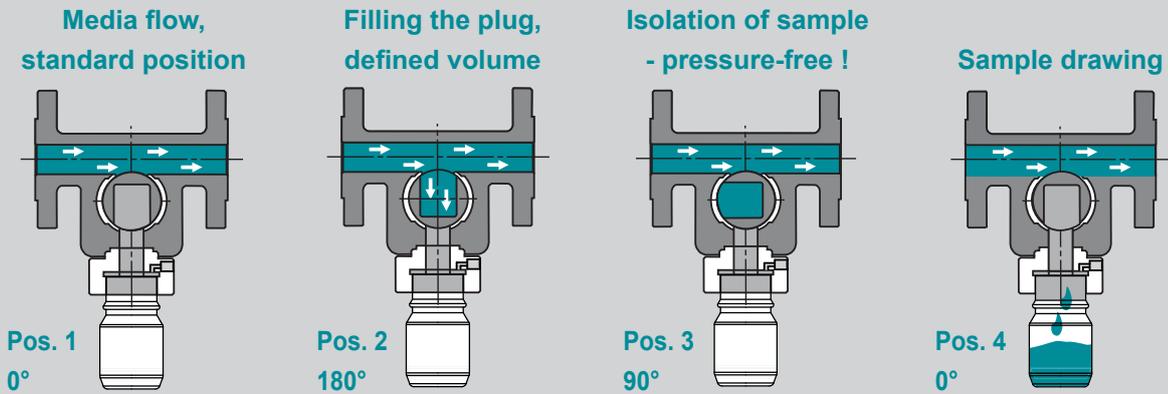


PT diagram, plug types, sealing systems, material selection: see catalogue part ENGINEERING

Pressureless, easy, safe, representative,  
defined sample volume

*Safety first!*

Functionality



**Safe sample drawing**

- pressure-free sampling for incompressible media
- isolated from the product flow (positive overlap)
- spillage-free sampling with individual bottle connections (option)

**Representative sample**

- directly from main product flow, no flow interruption
- no contamination or sediment due to the cavity-free design

**Emission-free**

- closed system
- product flow never exposed to atmosphere
- integrated ventilation into system during sample release (optional)

**Easy operation**

- no failures due to single lever operation and position indicator
- operation with
  - hand lever
  - actuator / gearbox 180°

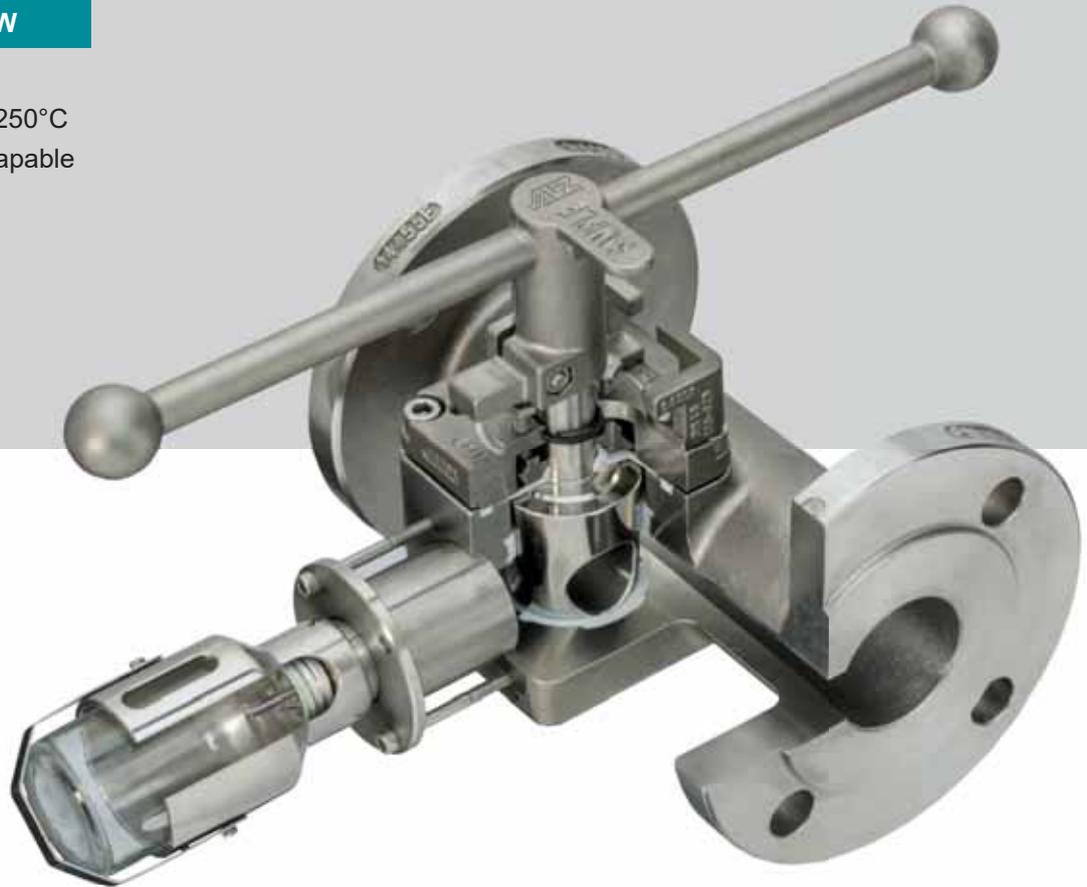


# Type CONTIFLOW

metallic with PTFE sleeve

## Type CONTIFLOW

T -60 < T < 250°C  
P<sub>MIN</sub> vacuum-capable  
P<sub>MAX</sub> 50 bar



**Type CONTIFLOW-SB**  
Compact Face to Face dimension  
wafer type

## Installation positions



STANDARD



HORIZONTAL



VERTICAL

# Type CONTIFLOW-AB / CONTIFLOW-A

fully PFA lined

## Type CONTIFLOW-AB

Based on type CONTIFLOW-A  
& exchangeable PTFE sleeve

- reduced torque
- repairable
- higher temperature resistance
- sustainable solution

**NEW!**

T -10 < T < 210°C  
P<sub>MIN</sub> vacuum-capable  
P<sub>MAX</sub> 25 bar



### Repair kit for CONTIFLOW-AB

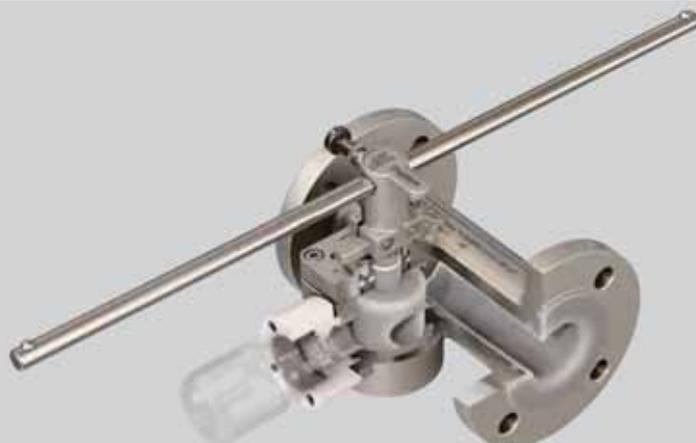
consisting of

- lined plug
- PTFE sleeve
- cover / stem sealing

## Type CONTIFLOW-A

Body and plug with PFA lining

T -10 < T < 150°C  
P<sub>MIN</sub> vacuum-capable  
P<sub>MAX</sub> 25 bar



# Type CONTIFLOW

## Air-evacuation and purge devices

### Air-evacuation device

Drawing vacuum from plug volume directly before sample drawing


- locking pin ensures vacuum position
- direction of rotation only counterclockwise

OPTION: EV




### Functionality


Basic position




Evacuation



Vacuum



Filling the plug sampling into bottle




### Purge device

Purging of plug, needle system and lab bottle with Nitrogen  $N_2$  or steam


- locking pin ensures purging position
- OPEN/CLOSE of purging line by plug (no additional valve necessary)

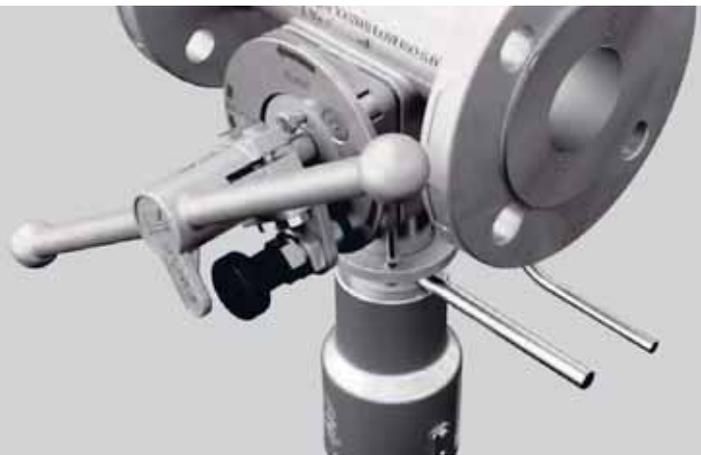OPTION: SP




### Functionality


Basic position




Filling the plug



Sampling into bottle



Nitrogen ( $N_2$ ) purge



# Type CONTIFLOW

## Accessories



### Increased sample volume

Increase of sample volume  $V_p$  by additional, modular adapter (standard installation position)

- plug volume  $V_p$ 
  - 75 ml
  - 100 ml
  - (standard plug 25/50 ml)
- modular design

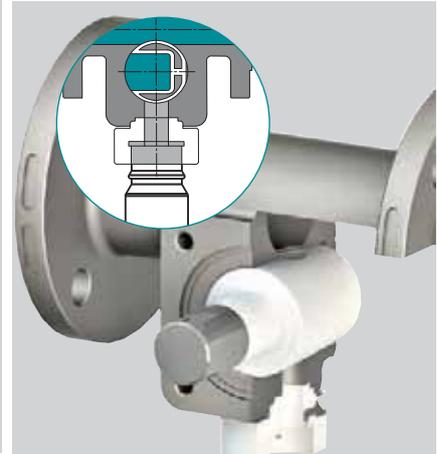
**OPTION:  $V_p$**



### Heating / cooling jacket

- solid cast full heating jacket, flange to flange
- heated cover seat
- different connections for heating medium
  - flanges
  - threaded
  - welding ends

**OPTION: HM**



### Cleaning in Place – CIP

- CIP-compliant
- with PTFE/PFA lined plug
- without sleeve, gapless
- for pharmaceutical applications



### Protection box

Types

- for the whole sampling valve
- with ventilation, exhaust
- lockable
- heatable / coolable
- with lighting
- detection of bottles, filling level etc.



**CONTIFLOW-PLC**  
with protection box

**ATEX option**



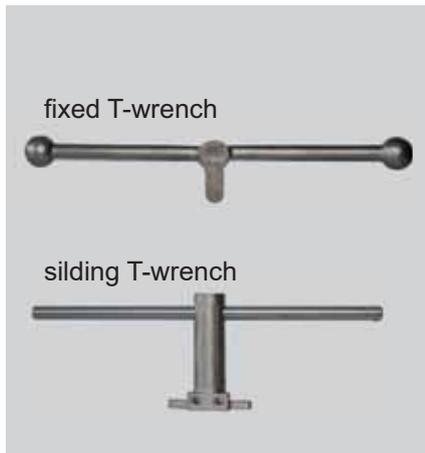
### Protection box combination

Integrated control cabinet for automated sampling

- individual setting of time period, sampling cycle, volume
- sensors monitoring the sampling operation
- standard interface for actuator, sensor, pneumatic

# Type CONTIFLOW

## Operation



### Hand operation

- Standard lever material: stainless steel
- T-wrench with plug stem extension, Type KSV, 150 mm high, stainless steel
- Locking devices (option)

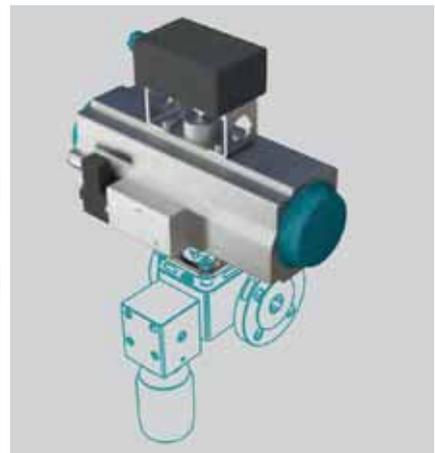


### Gearbox Type CGB

- smooth operation
- transmission ratio 80 : 1
- plug position indicator

**Type CGB 125**  
recommended for CONTIFLOW

**Type CGB 250**  
recommended for CONTIFLOW-A




### Actuator, pneumatic 180°

- single or double acting
- optional with switch boxes, positioners, solenoid valves



### Operation switch

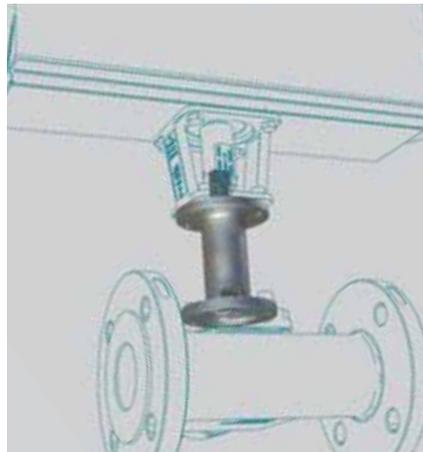for single or multiple operation to increase the sample volume



### Plug stem extension, type FV

- simple mounting of the extension and the actuators
- 100 mm height, others on request

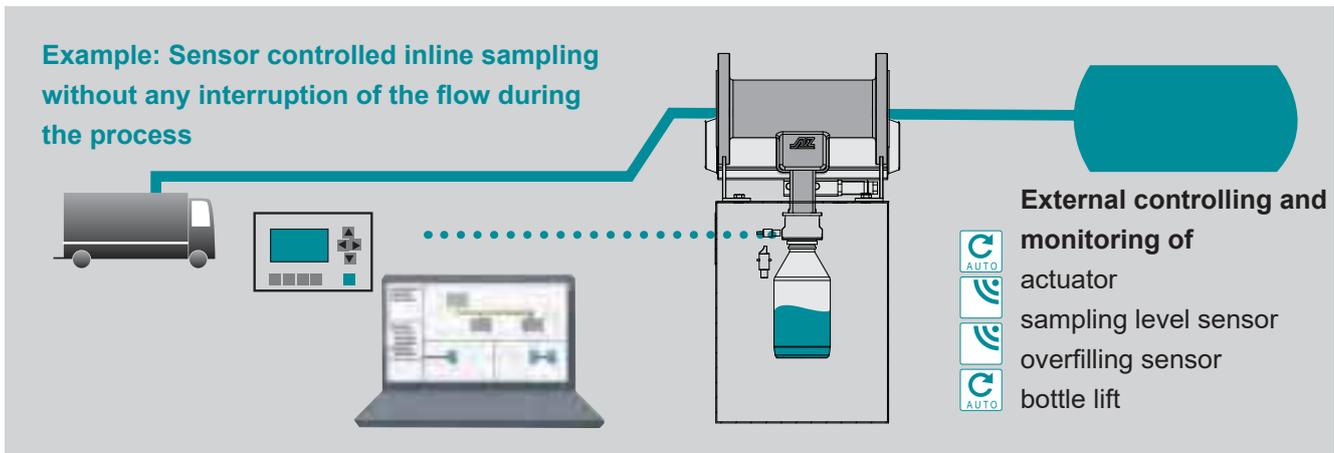


### Locking device

- for the safety operation for authorized personnel only
- optional for position
  - open
  - close
  - both positions

# Type CONTIFLOW-PLC-II

fully automated sampling - easily programmable controller



**Sampling protection box combination with integrated control box for advanced functions, e.g.**

- runtime error
- sampling interruption
- collective fault signal



**CONTIFLOW-PLC-II with protection box**

## Process of the sampling

- 1** Insert empty or partly filled bottle, close door
- 2** The bottle is lifted pneumatically
- 3** Automated sampling system
- 4** Indication after termination of program (no overflowing of bottle due to sensor)

# Type CONTIFLOW

## Technical information

DIN EN 1092-1 / 558									ASME B16.5 / B16.10					
DN	PN	L [mm]	R* [mm]	E [mm]	H** [mm]	weight [kg]	NPS	class	L [mm]	R* [mm]	E [mm]	H** [mm]	weight [kg]	
15	10-40	130	330/500	78	135/128	7,5	½	150	127	330/500	78	135/128	7,2	
25	10-40	160	330/500	85	135/128	8,5	1	150	127	330/500	85	135/128	8,0	
40	10-40	200	330/500	90	135/128	10,5	1½	150	165	330/500	90	135/128	9,0	
50	10-40	230	330/500	96	135/128	13,5	2	150	178	330/500	96	135/128	11,5	
80	10-40	310	330/500	110	190/173	20,5	3	150	203	330/500	110	190/173	17,5	
100	10-16	350	330/500	125	190/173	22,0	4	150	229	330/500	125	190/173	20,5	



\*) 330 mm for metallic CONTIFLOW with PTFE-vegin or TFM sleeve  
 500 mm for metallic CONTIFLOW with P-sleeve and for lined CONTIFLOW-AB / CONTIFLOW-A  
 Note: CONTIFLOW-AB possible with 330 mm in case of space constraints

\*\*\*) Size CONTIFLOW / CONTIFLOW-AB + CONTIFLOW-A


Other sizes and ratings on request.

Some designs, sizes and/or configurations may be fitted with threaded flange holes.


Type CONTIFLOW





Type CONTIFLOW-V

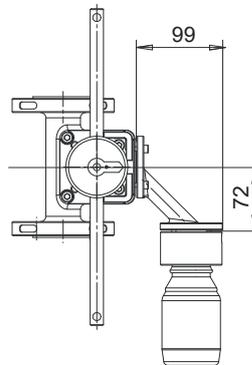


Type CONTIFLOW-W

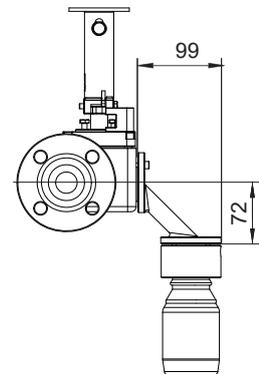


Type CONTIFLOW-AB  
 Type CONTIFLOW-A




Type CONTIFLOW-AB-V  
 Type CONTIFLOW-A-V



Type CONTIFLOW-AB-W  
 Type CONTIFLOW-A-W




PTFE adapter




H = height of lab bottle

needle system, type NH



clamping bottle holder, type SFH



Type	plug sample volume $V_p$ [ml]			bottle volume $V_f$ [ml]	sample volume $V_p$ [ml]	N [mm]	S [mm]
	PTFE adapter	needle system	clamping bottle				
CONTIFLOW	25/50/75/100	25/50/75/100	25/50/75/100	50 (GL32) / 60 (PP25)	25	172	224
CONTIFLOW-V	25**	25**	25**		50	202	
CONTIFLOW-W	25**	25**	25**	100 (GL 45 / PP28)	25	185	224
CONTIFLOW-AB	25/50*	***	25/50*		$\geq 50$	215	
CONTIFLOW-A				25	225		
CONTIFLOW-AB-V	25	***	25	250 (GL45) /300 (PP28)	$\geq 50$	255	224
CONTIFLOW-A-V				25	259		
CONTIFLOW-AB-W	25	***	25	500 (GL45 / PP28)	$\geq 50$	289	258
CONTIFLOW-A-W				25	314		
CONTIFLOW-CIP	25	25	25	1000 (GL45 / PP28)	$\geq 50$	344	-


\*)  $V_p$  50 ml only for metal plugs (not lined)

\*\*\*)  $V_p > 25$  ml on request

\*\*\*\*) on request

# Type CONTIFLOW

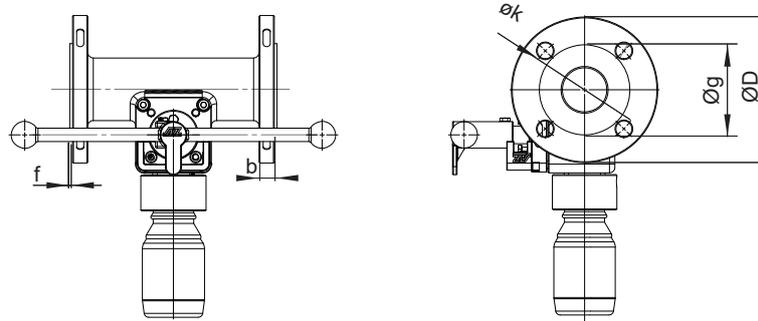Flange dimensions acc. to DIN EN / ASME



	DN	PN	øD [mm]	flange bore øk [mm]	No.	ø [mm]	øg [mm]	b [mm]	f [mm]	
	DIN EN 558	15	10-40	95	65	4	14	45	16	2
20		10-40	105	75	4	14	58	18	2	
25		10-40	115	85	4	14	68	18	2	
32		10-40	140	100	4	18	78	18	2	
40		10-40	150	110	4	18	88	18	3	
50		10-40	165	125	4	18	102	20	3	
65		10-16 25-40	185	145	4 8	8	18	122	18 22	3
80		10-40	200	160	8	18	138	24	3	
80S		10-40	200	160	8	18	138	24	3	
100		10-16 25-40	220 235	180 190	8	18 22	158 162	20 24	3	
	NPS	Class	øD [mm]	flange bore øk [mm]	no.	ø [mm]	øg [mm]	b [mm]	f [mm]	
	ASME B16.10	½	150	90	60,3	4	15,7	34,9	10,0	2
		300	95	66,7				14,7		
¾		150	100	69,9	4	15,7	42,9	10,9	2	
		300	115	82,5		19,1		16,3		
1		150	110	79,4	4	15,7	50,8	11,6	2	
		300	125	88,9		19,1		17,9		
1¼		150	115	88,9	4	15,7	63,5	13,2	2	
		300	135	98,4		19,1		19,5		
1½		150	125	98,4	4	15,7	73,0	14,7	2	
		300	155	114,3		22,3		21,1		
2		150	150	120,7	4	19,1	92,1	16,3	2	
		300	165	127,0	8	19,1		22,7		
2½		150	180	139,7	4	19,1	104,8	17,9	2	
		300	190	149,3	8	22,3		25,9		
3	150	190	152,4	4	19,1	127	19,5	2		
	300	210	168,3	8	22,3		29,0			
4	150	230	190,5	8	19,1	157,2	24,3	2		
	300	255	200,0		22,3		32,2			

# Type CONTIFLOW

## How to order

Order Example											
CONTIFLOW	-	DN 25	PN16	FS	PTFE	1.4408/1.4408	V <sub>p</sub> 25	PTFE GL45	250	HL	HM/FV

<b>TYPE</b>											
CONTIFLOW											
CONTIFLOW-AB / -A											
<b>INSTALLATION</b>											
-	standard										
W	horizontal										
V	vertical										
<b>SIZE</b>											
NPS	½ up to 6										
DN	15 up to 150										
<b>PRESSURE RATING</b>											
CL150	PN10										
CL300	PN16										
	PN25										
	PN40										
<b>SEALING SYSTEMS</b>											
STD	for all major applications										
FS	Fire-Safe sealing										
FSN	Fire-Safe safety sealing										
FSN-SL	Fire-Safe safety sealing (live loaded disc spring)										
CA	Chemical sealing										
CASN	Chemical safety sealing										
CASN-SL	Chemical safety sealing (live loaded disc spring)										
<b>SLEEVE MATERIALS</b>											
PTFE	T <sub>max</sub> 230°C										
PTFE (glass)	T <sub>max</sub> 230°C										
mod. PTFE	T <sub>max</sub> 250°C										
PTFE graphite	T <sub>max</sub> 250°C										
PTFE-P	T <sub>max</sub> 320°C										
<b>STANDARD MATERIALS</b>											
CONTIFLOW											
body	Stainless Steel	A351 Gr. CF8M	1.4408								
plug	Stainless Steel	A351 Gr. CF8M	1.4408								
CONTIFLOW-AB											
body	Carbon Steel	A216 Gr. WCB	1.0619								
	Stainless Steel	A351 Gr. CF8M	1.4408								
	Lining	PFA, PFA-conductive, FEP									
plug	Lining	PTFE, PFA, PFA-conductive, FEP									
<b>SAMPLE VOLUME (plug)</b>											
V <sub>p</sub>	25 / 50 / 75 / 100 ml										
<b>SAMPLING CONNECTION</b>											
PTFE	PTFE adapter, GL 32/45 PP 25/28										
NH	Needle system, needle 2 / 3 / 4 / 6 mm										
SFH	Clamping bottle holder, GL 32/45 PP 25/28										
<b>BOTTLE VOLUME</b>											
GL	50 / 100 / 250 / 500 / 1000 for PTFE adapter and Clamping bottle holder										
PP	60 / 100 / 300 / 500 for needle system										
<b>ACTUATION</b>											
HL	lever										
HLL	lever, lockable										
KSV	T-wrench										
KSVL	T-wrench, lockable										
CGB	gearbox										
GBL	hand gear, lockable										
AT	Actuator (please note type and accessories)										
PLC	fully automated sampling (separate description)										
<b>OPTIONS (multiple use possible)</b>											
CIP	clean-in-place										
HM	heating jacket / cooling jacket										
SP	purge device										
EV	air-evacuation device										
FV	cover extension										
SK	Protection box (separate description)										
ATEX											

# Cover and stem sealing systems suitable for general applications

Type STANDARD	
	<ul style="list-style-type: none"> <li>● plug adjustment</li> <li>● thrust collar</li> <li>● cover sealing (PTFE)</li> <li>● stainless steel diaphragm</li> <li>● <b>Secondary sealing:</b> V-diaphragm (PTFE), delta thrust collar (PTFE)</li> <li>● <b>Primary sealing:</b> sleeve*</li> </ul>
Type FS2	Fire-Safe-sealing (API 607)
	<ul style="list-style-type: none"> <li>● plug &amp; packing adjustment</li> <li>● <b>Tertiary sealing:</b> Packing to atmosphere (graphite)</li> <li>● thrust collar</li> <li>● cover sealing (graphite)</li> <li>● stainless steel diaphragm</li> <li>● <b>Secondary sealing:</b> V-diaphragm (PTFE) and delta thrust collar (PTFE)</li> <li>● <b>Primary sealing:</b> sleeve*</li> </ul>
Type CA2	Chemistry sealing
	<ul style="list-style-type: none"> <li>● plug &amp; packing adjustment</li> <li>● <b>Tertiary sealing:</b> Packing to atmosphere (PTFE)</li> <li>● thrust collar</li> <li>● cover sealing (PTFE)</li> <li>● stainless steel diaphragm</li> <li>● <b>Secondary sealing:</b> V-diaphragm, delta thrust collar (PTFE)</li> <li>● <b>Primary sealing:</b> sleeve*</li> </ul>

\*) The sleeve material has a decisive influence on the maximum operating temperature  
Material selection acc. to PT-diagram

# More safety for severe applications

*engineered.  
fast.  
dynamic.*

**Type FSN**      **Fire-Safe-sealing (API 607)**



- plug adjustment ●
- triple safety stem packing adjustment ●
- Tertiary sealing:** triple safety stem packing (graphite) ●
- Secondary sealing:** V-diaphragm (PTFE) and delta thrust collar (PTFE) ●
- cover sealing (graphite) ●
- Primary sealing:** sleeve\* ●

**Type FSN-EF**      **Fire-Safe-sealing (API 607)**

**Emission Free**

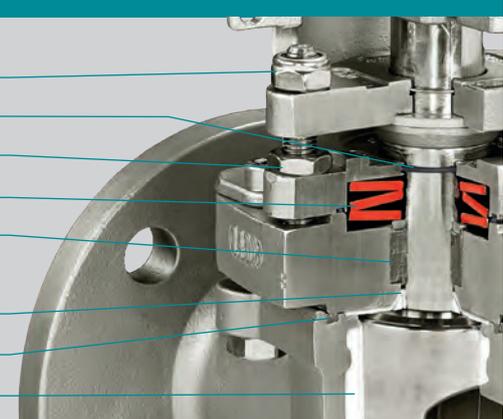
**NEW!**



- plug adjustment ●
- triple safety stem packing adjustment ●
- Quaternary sealing:** three o-rings at the stem ●
- Tertiary sealing:** triple safety stem packing ●
- Secondary sealing:** V-diaphragm (PTFE) and delta thrust collar (PTFE) ●
- cover sealing (graphite) ●
- Primary sealing:** sleeve\* ●

**Type FSN-SL**      **Fire-Safe-sealing (API 607)**

**live-loaded**



- plug adjustment ●
- o-rings protect the springs against corrosion ●
- triple safety stem packing adjustment ●
- disk springs (optionally made of Inconel) ●
- Tertiary sealing:** triple safety stem packing (graphite) ●
- Secondary sealing:** V-diaphragm (PTFE) and delta thrust collar (PTFE) ●
- cover sealing (graphite) ●
- Primary sealing:** sleeve\* ●

\*) The sleeve material has a decisive influence on the maximum operating temperature  
Material selection acc. to PT-diagram

Material for **type CASN** and **CASN-SL** chemistry safety sealing: packing and cover sealing in PTFE

# Special sealing systems

## Chevron packing

- increases the contact pressure (when pressure builds up on the safety stem packing towards plug stem)
- for toxic and fugitive media
- high wear resistance



## Type CL Chlorine / gas applications

- approved for chlorine applications and other toxic gases
- ideal for media with changing state of aggregate (e.g. liquid to gas, vice versa)
- vacuum capable



## Detection ports for monitoring purpose of lethal gases (phosgene, etc.)

- detection ports for early recognition of potential leakages
- sniffing at sealing surfaces to atmosphere

stem packing

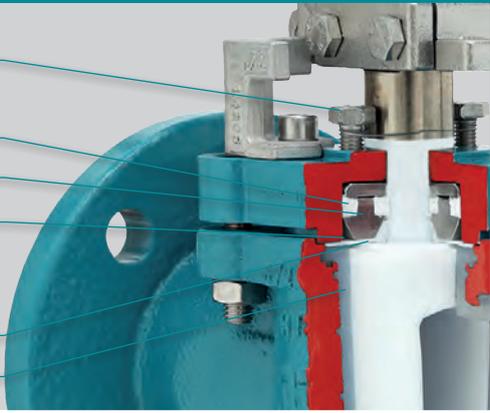
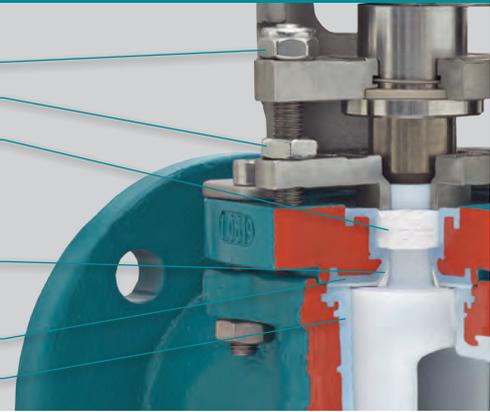
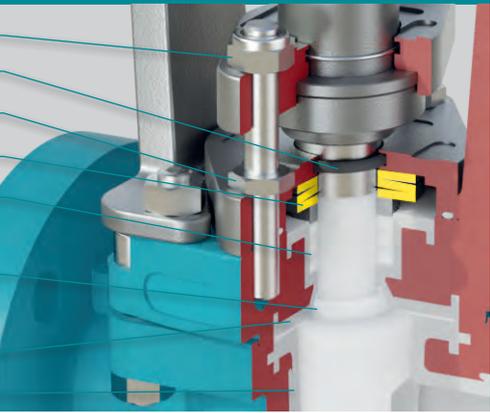
cover sealing

flange sealing



# Cover and stem sealing systems for lined plug valves

*engineered.  
fast.  
dynamic.*

Type CA	Chemistry sealing				
<p>plug &amp; packing adjustment</p> <p><b>Tertiary sealing:</b> Packing to atmosphere (PTFE)</p> <p>thrust collar</p> <p>stainless steel diaphragm</p> <p><b>Secondary sealing:</b> V-diaphragm &amp; delta thrust collar (PTFE)</p> <p><b>Primary sealing:</b> lined body</p>					
		Type SAFE-LINED	Chemistry sealing		
		<p><b>lined cover</b></p> <p>plug adjustment</p> <p>triple safety stem packing adjustment</p> <p><b>Tertiary sealing:</b> triple safety stem packing (PTFE) to atmosphere</p> <p><b>Secondary sealing:</b> V-diaphragm (PTFE), delta thrust collar (PTFE)</p> <p>lined cover</p> <p><b>Primary sealing:</b> lined body*</p>			
				Type SAFE-LINED-SL	Chemistry sealing
				<p><b>live-loaded</b></p> <p>plug adjustment</p> <p>o-rings protect the springs against corrosion</p> <p>triple safety stem packing adjustment</p> <p>disk springs (optionally made of Inconel)</p> <p><b>Tertiary sealing:</b> triple safety stem packing (PTFE) to atmosphere</p> <p><b>Secondary sealing:</b> V-diaphragm (PTFE), delta thrust collar (PTFE)</p> <p>lined cover</p> <p><b>Primary sealing:</b> lined body*</p>	

\*) Lining and plug material have a decisive influence on the maximum operating temperature  
Material selection according to PT-diagram.

# Casting materials



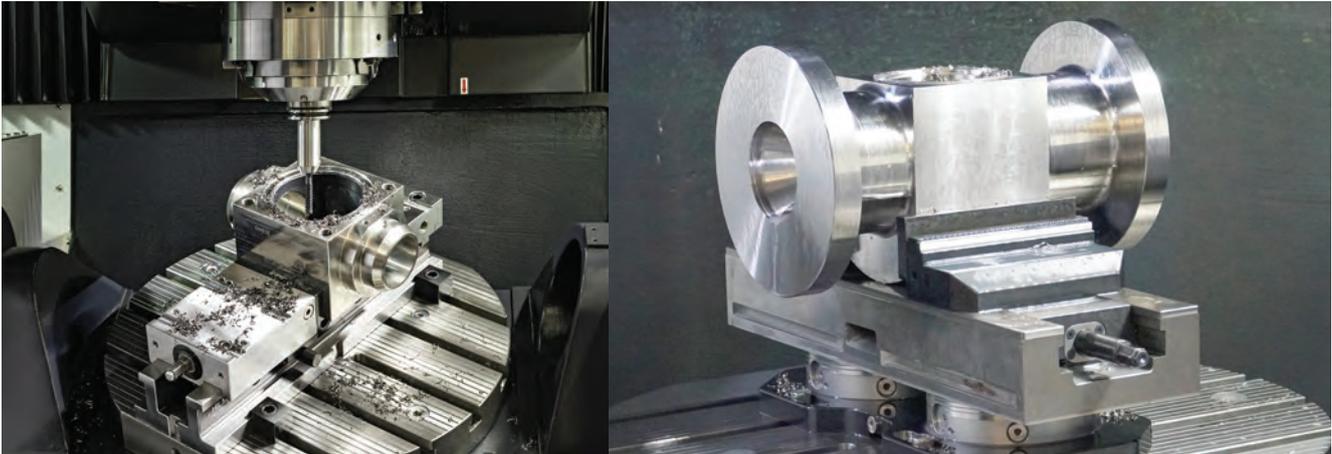
Material Group	Common Name	Casting Material					
		EN / DIN	Short name	Material-No.	ASTM	Grade	UNS
<b>Carbon Steel / Ductile Iron</b>							
Ductile Iron	SG Iron	EN 1563	EN-GJS-400-18-LT	5.3103	A395	-	F32800
Carbon Steel	CS	EN 10213	GP240GH	1.0619	A216	WCB	J03002
Low Temp. Carbon Steel	LTCS	EN 10213	G17Mn5	1.1131	A352	LCB	J03003
Low Temp. Carbon Steel	LTCS	EN 10213	G21Mn5	1.1138	A352	LCC	J02505
<b>Stainless Steel</b>							
Stainless Steel	Duplex 2205	EN 10213	GX2CrNiMoN22-5-3(4A)	1.4470	A995	4A-CD3MN	J92205
Stainless Steel	Duplex 1B	EN 10213	GX3NiCrMoCuN26-6-3-3	1.4517	A995	1B-CD4MCuN	J93372
Austenitic	SS	EN 10213	GX5CrNi19-10	1.4308	A351	CF8	J92600
Austenitic	SS	EN 10213	GX2CrNi19-11	1.4309	A351L	CF3	J92700
Austenitic	SS	EN 10213	GX5CrNiMo19-11-2	1.4408	A351	CF8M	J92900
Austenitic	SS	EN 10213	GX2CrNiMo19-11-2	1.4409	A351	CF3M	J92800
Super Austenitic	Alloy 20	EN 10213	NiC420CuMo	1.4500	A351	CN7M	N08007
Super Austenitic	Alloy 20 mod.	EN 10213	GX2NiCrMoCuN25-20	1.4536	A743	CN7MS	J94650
Super Austenitic	AL6XN	-	-	-	A351	CN3MN	J94651
Superduplex	Superduplex 5A	EN 10213	25Cr-7Ni-Mo-N	1.4469	A995	CE3MN	J93404
<b>Nickel Alloy</b>							
	Monel/Alloy400	DIN 17730	G-NiCu30 Nb	2.4365	A494	M35-1	N24135
	Hastelloy C mod.	-	-	-	A494	CW6M	N30107
	Hastelloy C	-	-	2.4537	A494	CW12MW	N30002
	Hastelloy C-276	-	-	2.4883	-	-	-
	Hastelloy B-3	-	-	-	-	-	-
	Inconel 600	-	-	-	A494	CY40	N06040
	Inconel 625	-	-	-	A494	CW6MC	N26625
	Inconel 825	-	-	-	A494	CU5MCuC	N08826
	Nickel	DIN 17730	G-Ni 95	2.4170	A494	CZ100	N02100
<b>Other Material Groups</b>							
Tantalum	Tantalum	-	-	-	-	-	-
Titanium	Ti 2	DIN 17865	G-Ti 2	3.7031	B367	C-2	R52550
Zirconium	Zirconium 702	-	-	-	B752	702C	-
Zirconium	Zirconium 705	-	-	-	-	705C	-

All rights reserved, all indications without engagement, subject to modifications.

The use of these equivalents has to be evaluated on a case-by-case basis.

Other materials on request.

# Equivalent forged and bar-stock materials



Common Name	Mat.Nr.	Grade	Similar Forged Material						Bar Material	
			EN / DIN	Short Name	Mat.Nr.	ASTM	Grade	UNS	ASTM Short	
<b>Carbon Steel / Ductile Iron</b>										
SG Iron	5.3103	-	EN 1563	EN-GJS-400-18-LT	5.3103	A395-99	60-40-18	-	-	-
CS	1.0619	WCB	EN 10213	GP240GH	1.0619	A105	A105	-	-	-
LTCS	1.1131	LCB	-	-	-	A350	LF2-Class1	G10300	-	-
LTCS	1.1138	LCC	-	-	1.0566	A350	LF2-Class1	G10250	-	-
<b>Stainless Steel</b>										
Duplex 2205	1.4470	4A-CD3MN	EN 10028-7	X2CrNiMoN22-5-3	1.4462	A182	F51	S32205	A479	S31803
Duplex 1B	1.4517	1B-CD4MCuN	EN 10028-7	X2CrNiMoCuN25-5-3	1.4507	A182	F59	S32520	A479	S32550
SS	1.4308	CF8	EN 10028-7	X5CrNi18-10	1.4301	A182	F304	S30400	A276	304
SS	1.4309	CF3	EN 10028-7	X2CrNi19-11	1.4306	A182	F304L	S30403	A276	304L
SS	1.4408	CF8M	EN 10028-7	X5C4NiMo17-12-2	1.4401	A182	F316	S31600	A276	316
SS	1.4409	CF3M	EN 10028-7	X2CrNiMo 17-12	1.4404	A182	316L	S31603	A276	316L
Alloy 20	1.4500	CN7M	-	-	2.4660	B462	N08020	N08020	B473	N08020
Alloy 20 mod.	1.4536	CN7MS	-	-	-	-	-	-	-	-
AL6XN	-	CN3MN	EN 10028-7	X1NiCrMoCuN25-20-7	1.4529	A182	F62	N08367	B462	N08367
Superduplex 5A	1.4469	CE3MN	EN 10028-7	X2CrNiMoN25-7-4	1.4410	A182	F63	S32615	-	-
<b>Nickel Alloy</b>										
Monel/Alloy400	2.4365	M35-1	DN 17744	NiCu30Fe	2.4360	B165	Alloy 400	N04400	B164	N04400
Hastelloy C mod.	-	CW6M	-	-	-	A494	-	-	-	-
Hastelloy C	-	CW12MW	-	NiMo16CrW	-	A494	-	-	-	-
Hastelloy C-276	-	-	DIN 17744	NiMo16Cr15W	2.4819	B565	N10675	N10276	B574	N10276
Hastelloy B-3	-	-	DIN 17744	NiMo29Cr	2.4600	B565	N10675	N10675	B335	N10675
Inconel 600	-	CY40	DIN 17742	NiCr15Fe	2.4816	B565	N06600	N06600	B166	N06600
Inconel 625	-	CW6MC	DIN 17744	NiCr22Mo9Nb	2.4856	B565	N06625	N06625	B446	N06625
Inconel 825	-	CU5MCuC	DIN 17744	NiCr21Mo	2.4858	B564	N08825	N08825	B425	N08825
Nickel	2.4170	CZ100	-	-	-	-	-	-	B160	N02200
<b>Other Material Groups</b>										
Tantalum	-	-	-	-	-	B365	TaW2,5	R05252	-	-
Ti 2	3.7031	C-2	DIN 17864	Grade 2	3.7035	B381	F2	R50400	B348	Grade 2
Zirconium 702	-	702C	-	-	6.0702	B493	R60702	R60702	B550	R60702
Zirconium 705	-	705C	-	-	-	B493	R60705	R60705	B550	R60705

All rights reserved, all indications without engagement, subject to modifications.

The use of these equivalents has to be evaluated on a case-by-case basis.

Other materials on request.

# Lining materials



## Lining materials

The high density, extremely resistant lining is at least 3 mm thick. New granulate is used exclusively, no refurbished regenerates or similar materials.

## Fluoropolymer lining materials

- Body: PFA, PFA conductive and FEP
- Plug: PTFE, PFA, PFA conductive and FEP

body lining	Combination of linings plug lining	T <sub>max</sub>
PFA	PTFE <sup>1)</sup> or special materials	210°C / 410°F
PFA	PFA	200°C / 392°F
PFA	FEP	150°C / 302°F
PFA conductive	PFA conductive	125°C / 257°F
FEP	FEP	150°C / 302°F
FEP	PFA	150°C / 302°F

- 1) Plugs with PTFE lining only for two-way valves up to DN 100.  
Plugs for multi-way valves not with PTFE lining available.

## IMPORTANT NOTE

For demanding conditions, such as process temperatures exceeding 150°C / 302°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of lining material, cover sealing type and special features.

# Sleeve materials



Category	Sleeve Material	Characteristics	Typical applications	T <sub>MAX</sub>
PTFE	PTFE, virgin	low friction, very good sealing characteristic	standard sleeve material for most applications	230°C / 446°F
RPTFE	PTFE-Glass	reinforced PTFE	additional stability for multiway valves with horizontal ports	230°C / 446°F
	PTFE-Graphite	reinforced PTFE	high temperature applications	250°C / 482°F
modified PTFE	TFM 1600* NXT 75* M 111*	chemically modified PTFE, reduced permeation, low friction	chemical applications where reduced permeability compared to PTFE is required	250°C / 482°F
Special Sleeves	PTFE-P* NFCE* NCS*	high performance sleeve materials	severe service highest temperatures, high pressure, abrasive applications	320°C / 608°F
PFA	PFA	reduced permeation	chemical applications where reduced permeability compared to PTFE is required	200°C / 392°F
UHMW-PE	UHMW-PE	Ultra High Molecular Weight Polyethylene	radiation resistant, abrasive application	80°C / 176°F

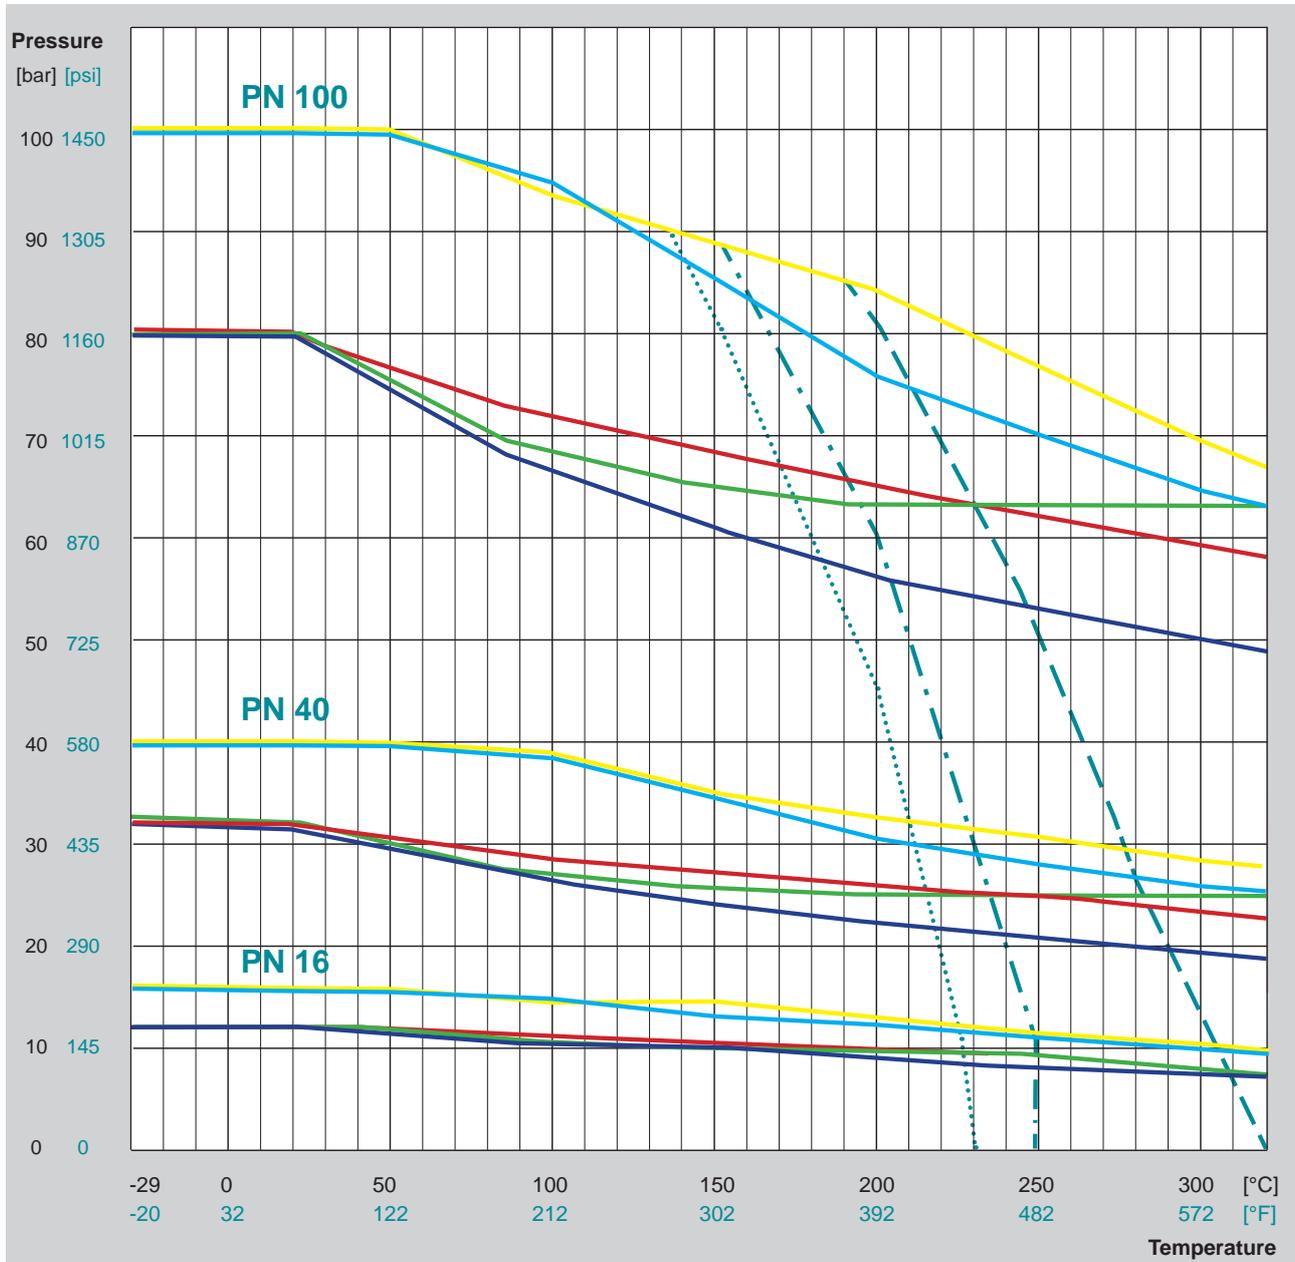
\*) sleeve material selection depending on availability at AZ manufacturing site

## IMPORTANT NOTE

for demanding conditions, such as process temperatures exceeding 200°C / 392°F:  
Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of sleeve material, cover sealing type and special features. For other sleeve materials not listed above: please contact your AZ sales representative.

# PT Diagram, PN 16 - PN 100

## PTFE sleeved plug valves



### Body material

- EN 10213 - 1.0619 / Carbon Steel
  - EN 10213 - 1.4408 / Stainless Steel
  - EN 17744 - 2.4819 / Hastelloy
  - EN 17730 - 2.4365 / Monel 400
  - UNS N08007 - 1.4500 / Alloy 20
- other body materials on request

### Sleeve material

- ..... PTFE (virgin) / PTFE (glass)  $T_{max}$  230°C / 446°F
  - .-.- TFM / NXT / M111 / PTFE graphite  $T_{max}$  250°C / 482°F
  - PTFE-P / NFCE / NCS  $T_{max}$  320°C / 608°F
- other sleeve materials on request

The data given are max. values according to EN 12516-1 and EN 1092-1.

### IMPORTANT NOTE

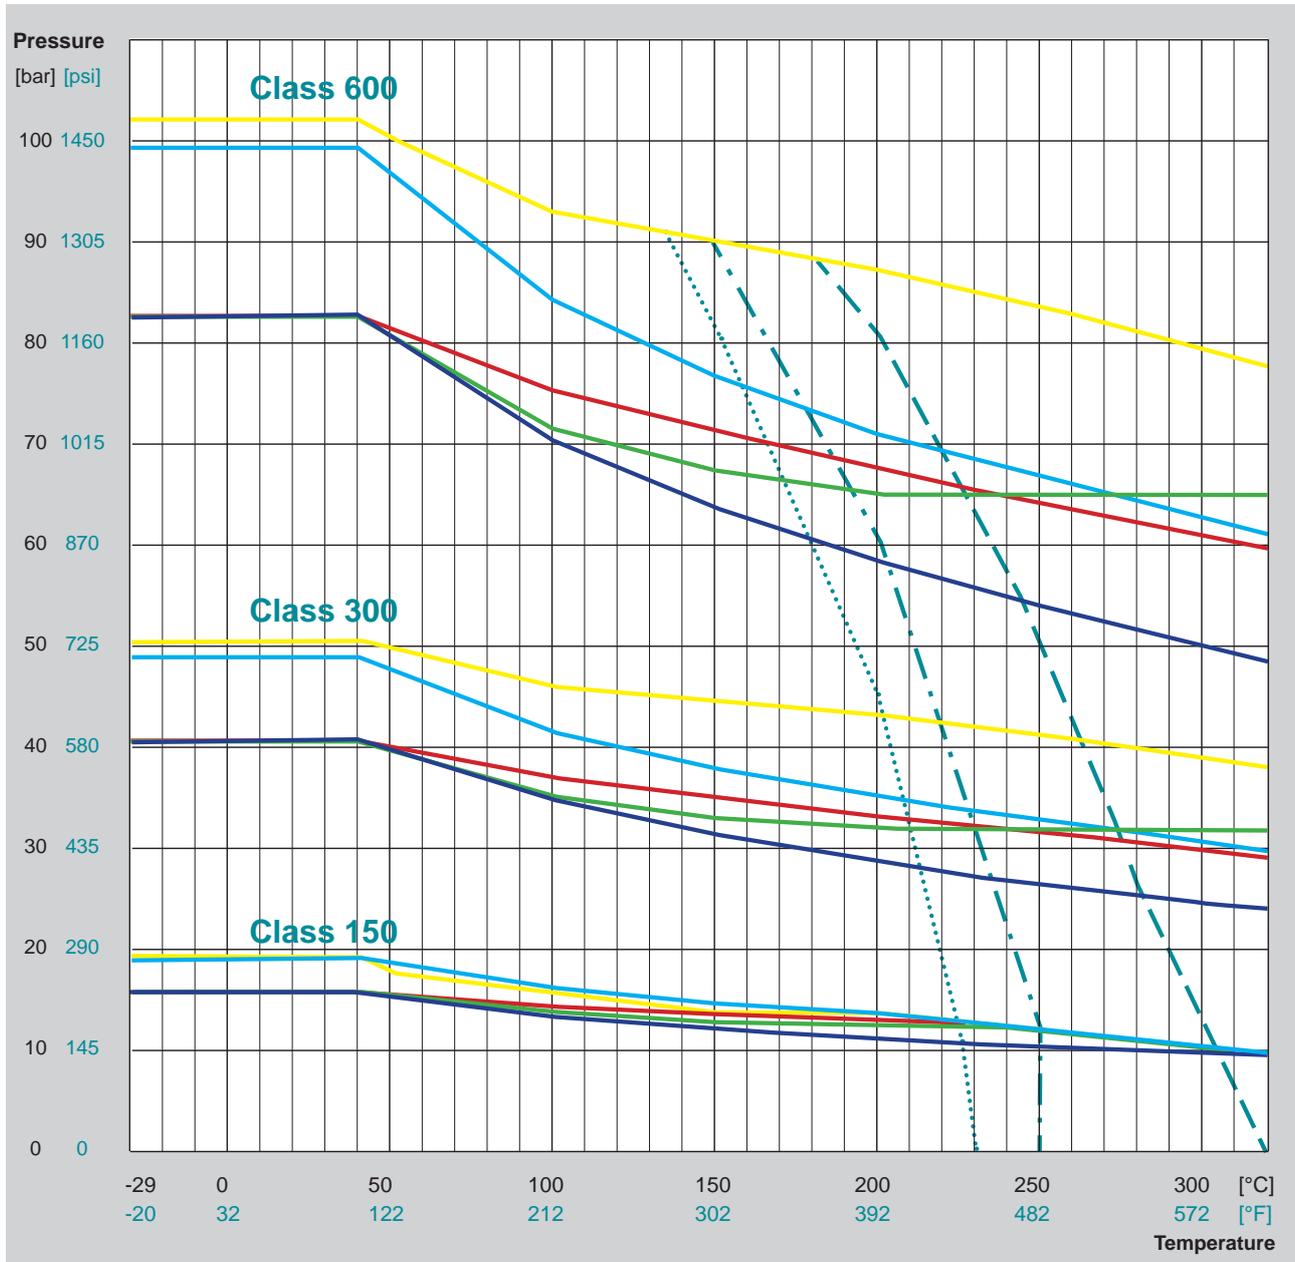
for demanding conditions, such as process temperatures exceeding 200°C / 392°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of sleeve material, cover sealing type and special features.

For temperatures < -29°C / -20°F, ( $T_{limit} = -60°C / -76°F$ ) operating temperature, low-temperature carbon steel or austenitic stainless steels are required.

Subject to technical change without notice.

# PT Diagram, Class 150 - Class 600

## PTFE sleeved plug valves



### Body material

- ASTM A216 - WCB
- ASTM A351 - CF8M
- ASTM A494 - CW12MW / Hastelloy
- ASTM A494 - M35.1 / Monel 400
- ASTM A351 - CN7M Alloy 20
- other body materials on request

### Sleeve material

- ..... PTFE (virgin) / PTFE (glass)  $T_{max}$  230°C / 446°F
- .-.- TFM / NXT / M111 / PTFE graphite  $T_{max}$  250°C / 482°F
- PTFE-P / NFCE / NCS  $T_{max}$  320°C / 608°F
- other sleeve materials on request

The data given are max. values according to ASME B16.34.

### IMPORTANT NOTE

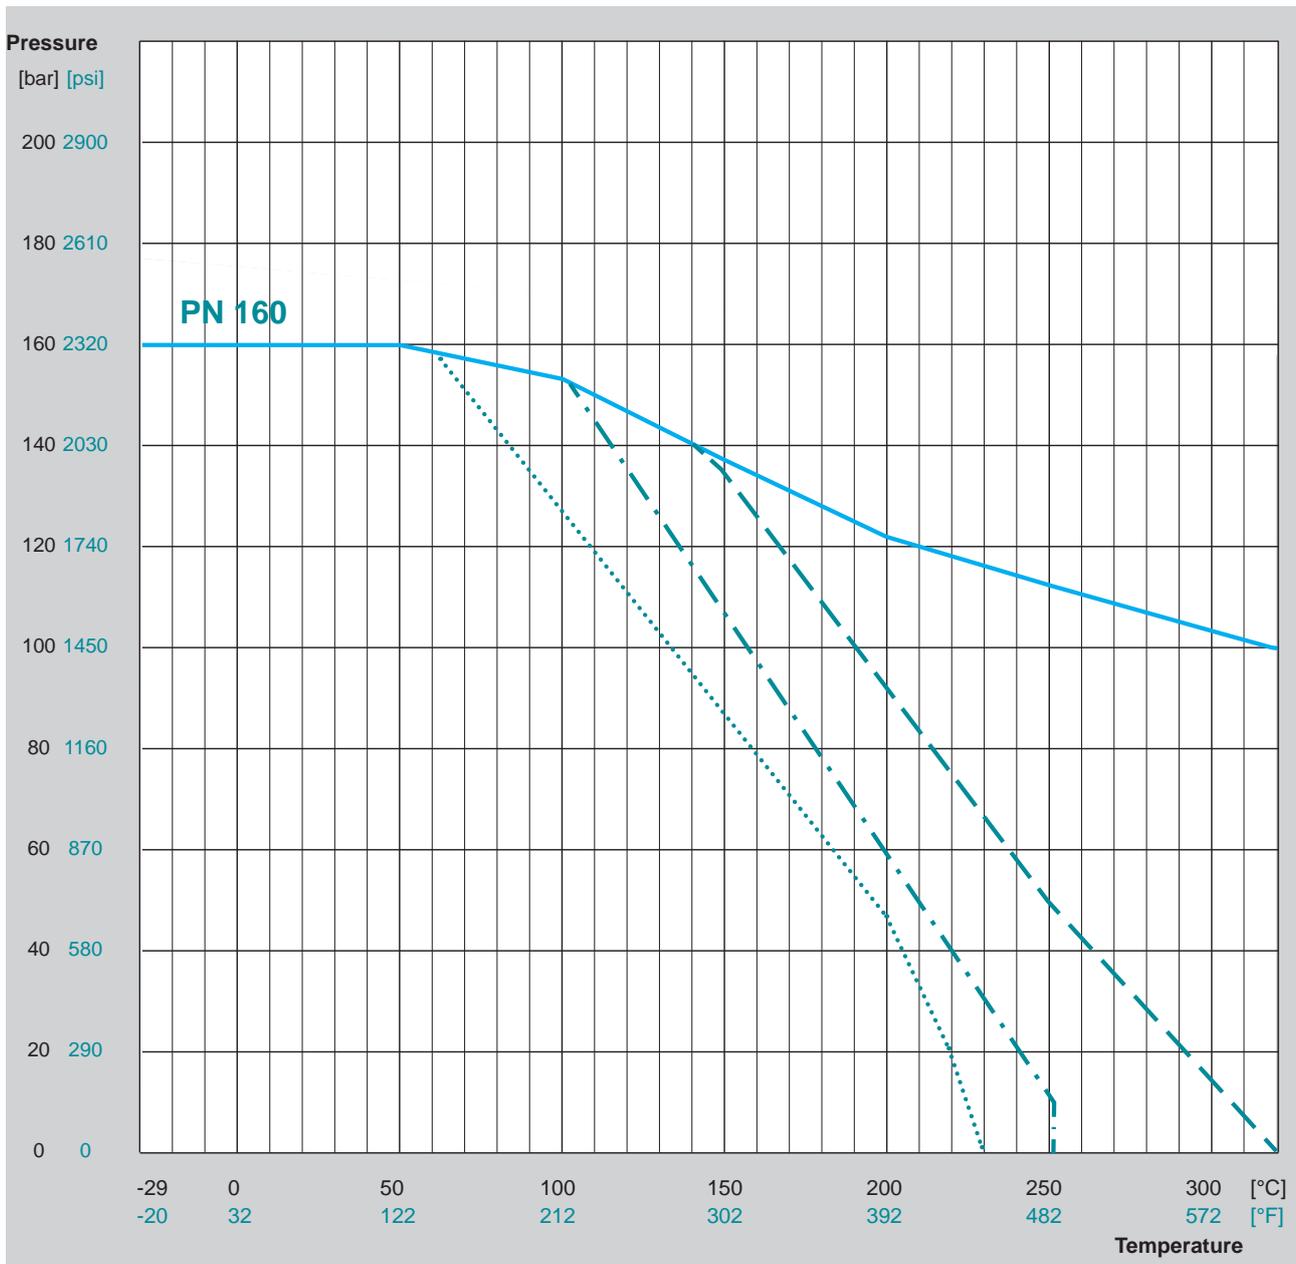
for demanding conditions, such as process temperatures exceeding 200°C / 392°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of sleeve material, cover sealing type and special features.

For temperatures < -29°C / -20°F, ( $T_{limit} = -60°C / -76°F$ ) operating temperature, low-temperature carbon steel or austenitic stainless steels are required.

Subject to technical change without notice.

# PT Diagram High Pressure, PN 160

## PTFE sleeved plug valves with trunnion mounted design



### Body material (in line with EN 12516-1 and EN 1092-1)

- EN 10213 - 1.4408 / Stainless Steel
- other body materials on request

### Sleeve material

- ..... PTFE (virgin) / PTFE (glass)  $T_{max}$  230°C / 446°F
- . - . TFM / NXT / M111 / PTFE graphite  $T_{max}$  250°C / 482°F
- PTFE-P / NFCE / NCS  $T_{max}$  320°C / 608°F
- other sleeve materials on request

The data given are max. values according to EN 12516-1 and EN 1092-1.

### IMPORTANT NOTE

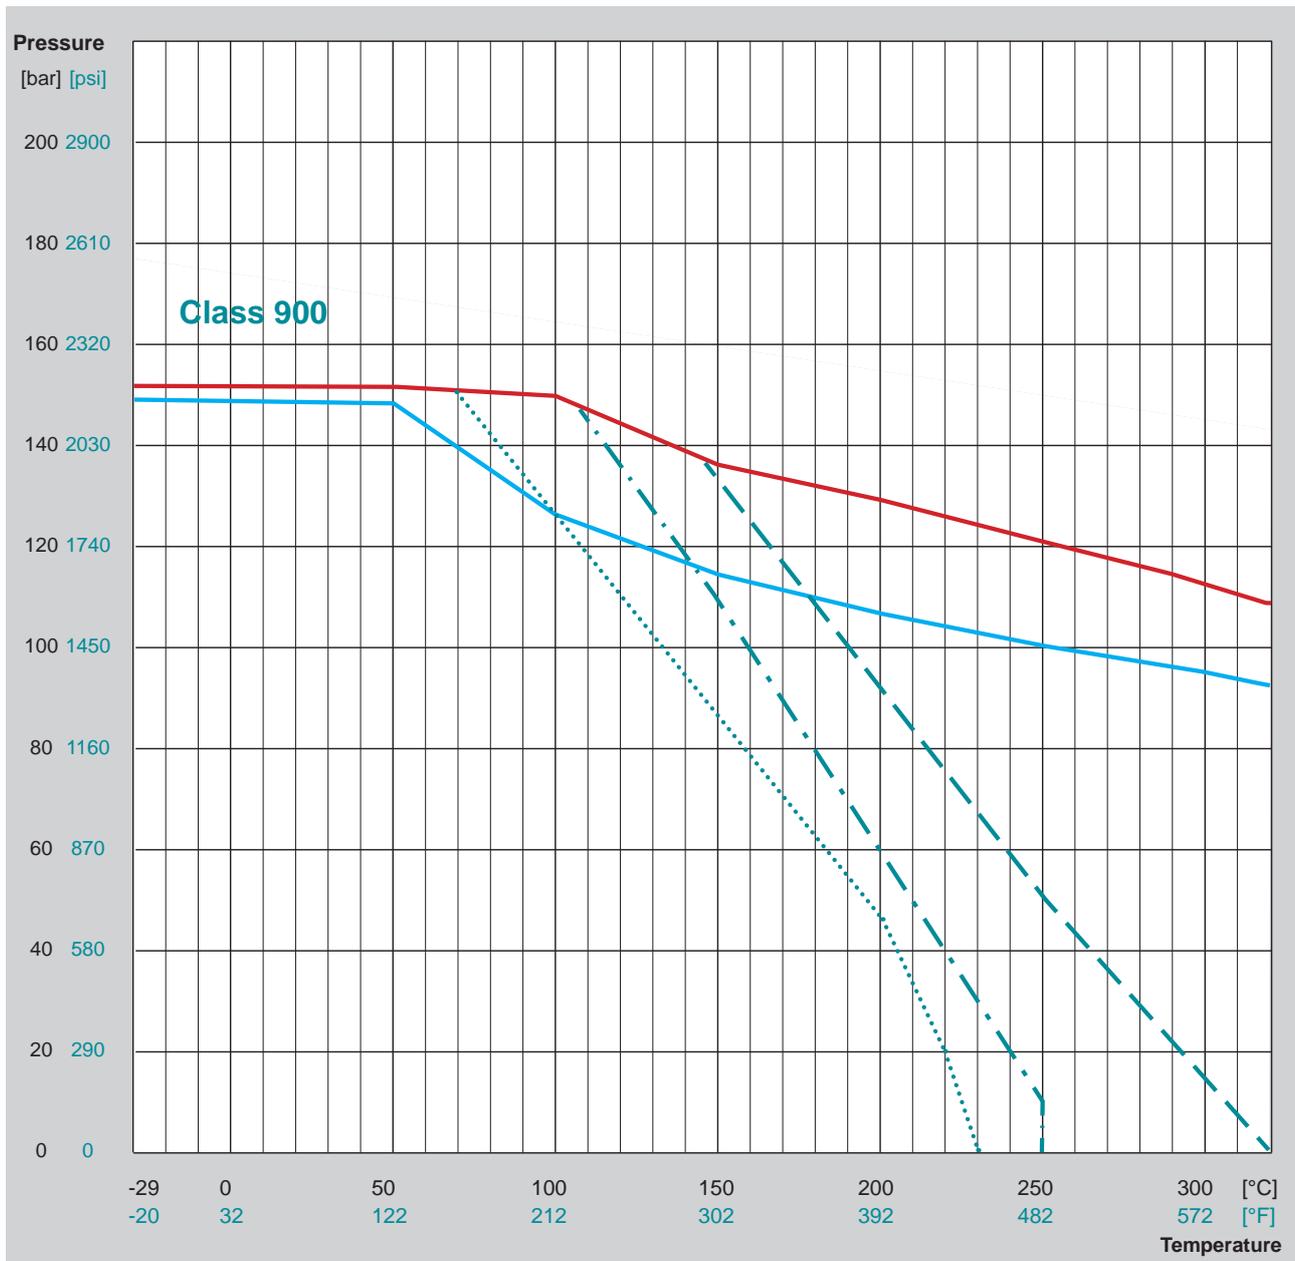
for demanding conditions, such as process temperatures exceeding 200°C / 392°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of sleeve material, cover sealing type and special features.

For temperatures < -29°C / -20°F, ( $T_{limit} = -60°C / -76°F$ ) operating temperature, low-temperature carbon steel or austenitic stainless steels are required.

Subject to technical change without notice.

# PT Diagram High Pressure, Class 900

## PTFE sleeved plug valves with trunnion mounted design



### Body material (in line with ASME B16.34)

- ASTM A351 - CF8M / Stainless Steel
- ASTM A995 - CD3MN / Superduplex
- other body materials on request

### Sleeve material

- ⋯⋯⋯ PTFE (virgin) / PTFE (glass)  $T_{max}$  230°C / 446°F
- · - · - TFM / NXT / M111 / PTFE graphite  $T_{max}$  250°C / 482°F
- - - - - PTFE-P / NFCE / NCS  $T_{max}$  320°C / 608°F
- other sleeve materials on request

The data given are max. values according to ASME B16.34.

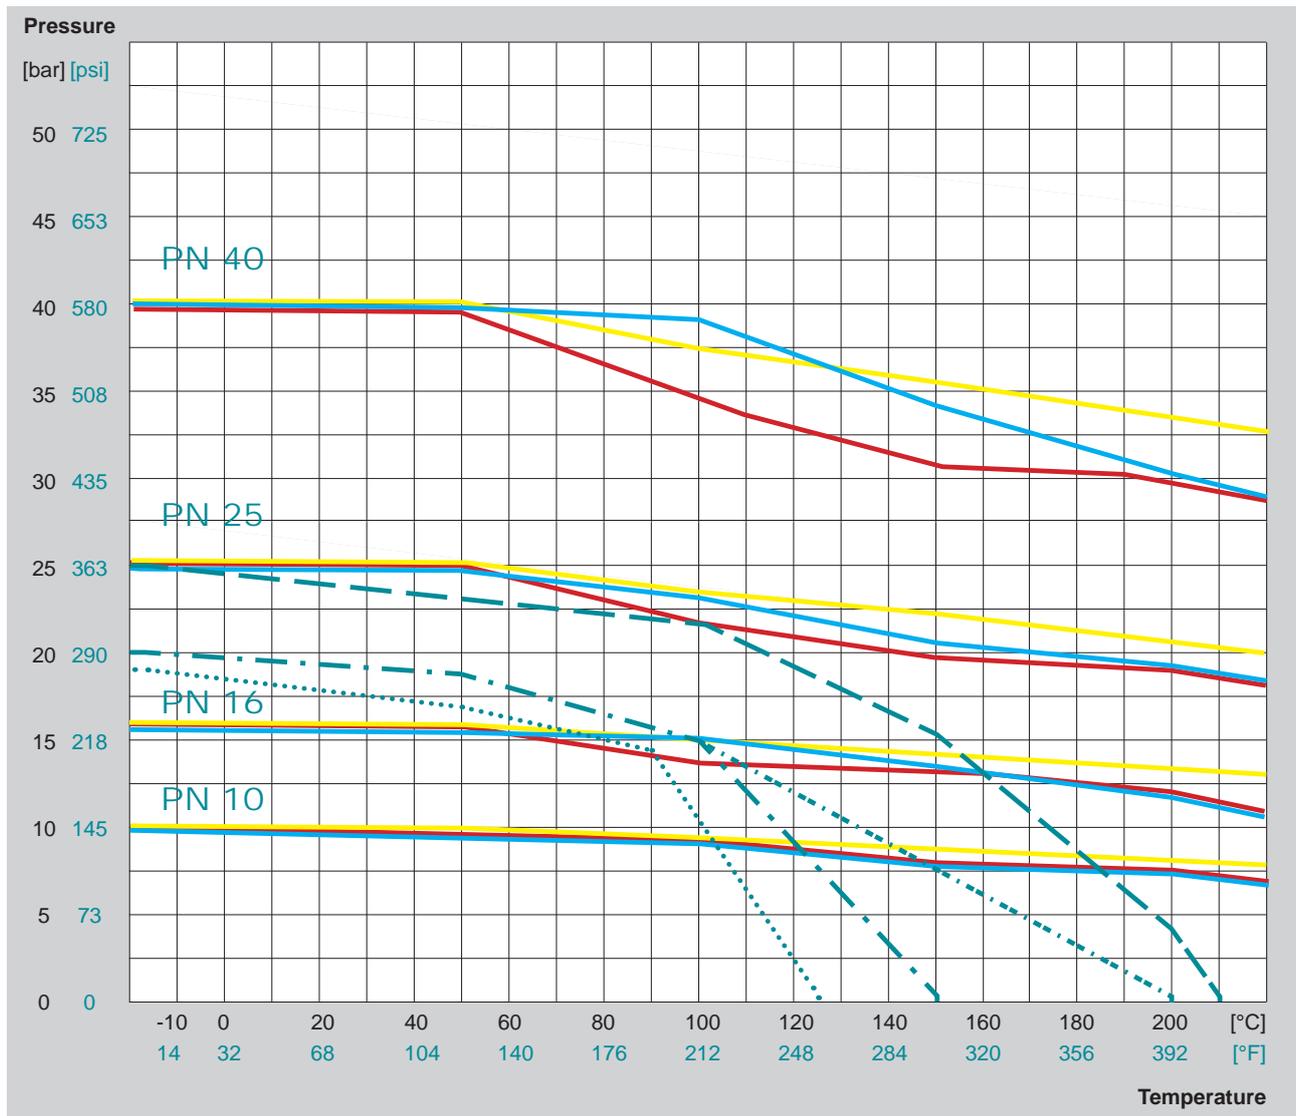
### IMPORTANT NOTE

for demanding conditions, such as process temperatures exceeding 200°C / 392°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of sleeve material, cover sealing type and special features.

Subject to technical change without notice.

For temperatures < -29°C / -20°F, ( $T_{limit} = -60°C / -76°F$ ) operating temperature, low-temperature carbon steel or austenitic stainless steels are required.

# PT Diagram, PN 10 - PN 40 lined valves



### Body material

- EN 10213 - 1.0619 / Carbon Steel
  - EN 10213 - 1.4408 / Stainless Steel
  - EN 1563 - EN-GJS-400-18-LT / Ductile Iron
- other body materials on request

### Lining combination

	Body	Plug / Ball	T <sub>MAX</sub>
<span style="color: teal;">- - -</span>	PFA	PTFE or special*	210°C / 410°F
<span style="color: teal;">. . . . .</span>	PFA	PFA	200°C / 392°F
<span style="color: teal;">- . - . -</span>	all combinations with PFA and FEP		150°C / 302°F
<span style="color: teal;">. . . . .</span>	PFA conductive	PFA conductive**	125°C / 257°F

\*) Special materials (metallic) for plugs without lining on request

\*\*\*) Material combination PFA / FEP possible

The data given are max. values according to EN 12516-4.

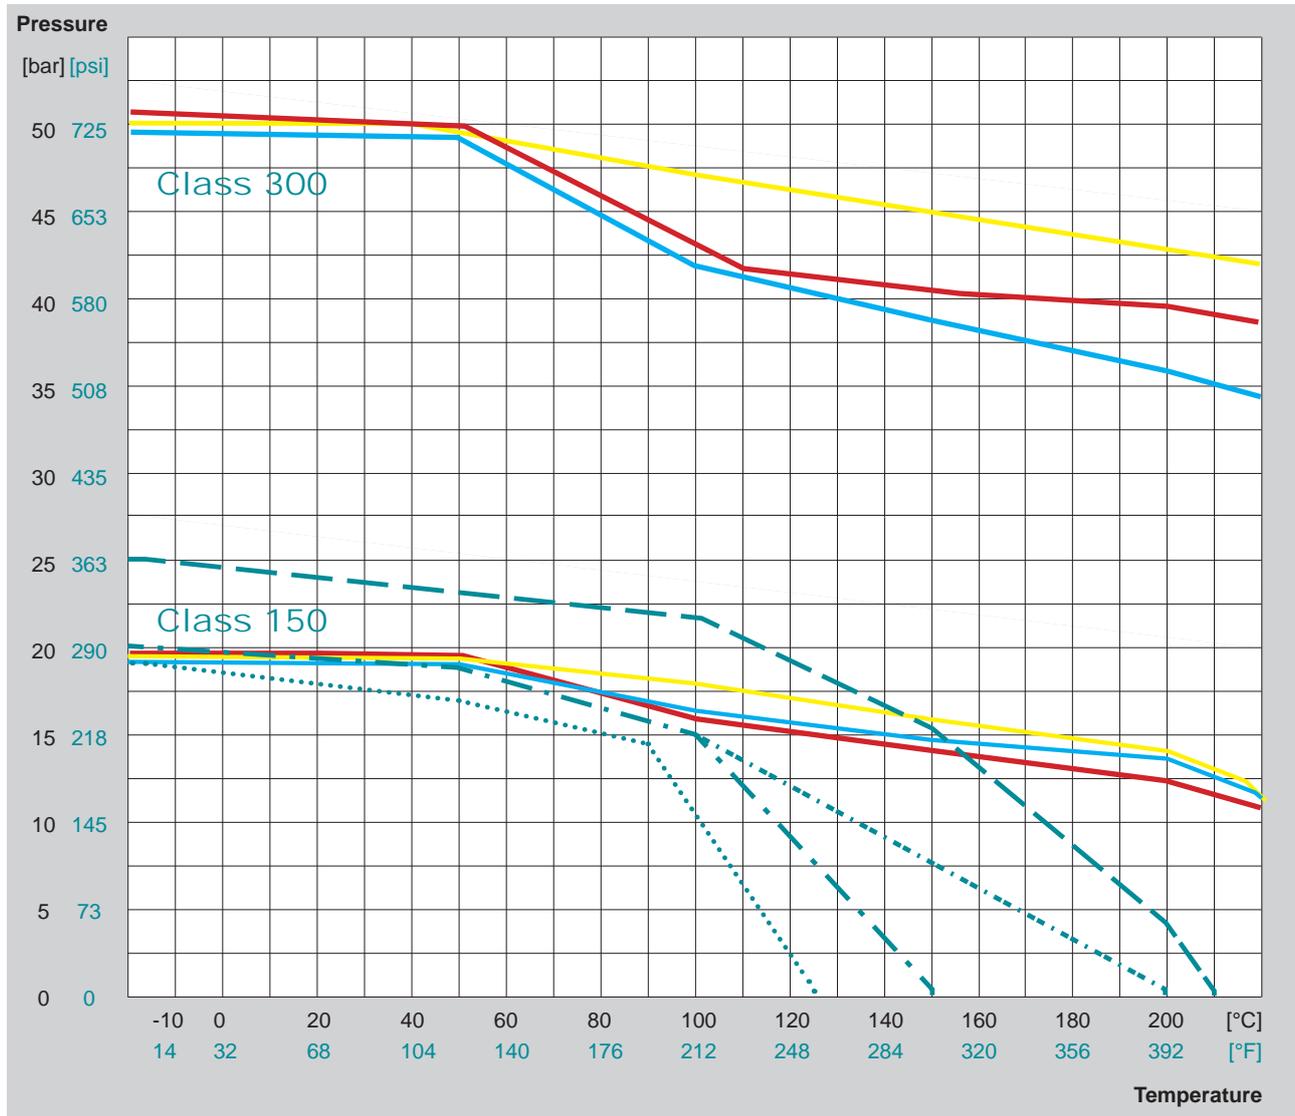
### IMPORTANT NOTE

for demanding conditions, such as process temperatures exceeding 150°C / 302°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of lining material, cover sealing type and special features.

Maximum breakaway torque depending on material combinations according to the technical data sheets of the plug valve.

Subject to technical change without notice.

# PT Diagramm, Class 150 - Class 300 lined valves



## Body material

- ASTM A216 - WCB
- ASTM A351 - CF8M / Stainless Steel
- ASTM A395 / Ductile Iron
- other body materials on request

## Lining combination

	Body	Plug / Ball	T <sub>MAX</sub>
<span style="color: teal;">- - -</span>	PFA	PTFE or special*	210°C / 410°F
<span style="color: teal;">. . . . .</span>	PFA	PFA	200°C / 392°F
<span style="color: teal;">- . - . -</span>	all combinations with PFA and FEP		150°C / 302°F
<span style="color: teal;">. . . . .</span>	PFA conductive	PFA conductive**	125°C / 257°F

\*) Special materials (metallic) for plugs without lining on request

\*\*\*) Material combination PFA / FEP possible

The data given are max. values according to EN 12516-4.

## IMPORTANT NOTE

for demanding conditions, such as process temperatures exceeding 150°C / 302°F: Valve size, media phase, plug position & temperature (constant or fluctuating) may have an impact on the lifetime. Consult factory for proper selection of lining material, cover sealing type and special features.

Maximum breakaway torque depending on material combinations according to the technical data sheets of the plug valve.

Subject to technical change without notice.

# Plug types: two-way and multi-port for standard reduced and full bore design



- position indicator for all multi-way valves welded on lever or stem extension
- Lined plug valves: multi-way plugs only with PFA / FEP plug lining or made of special materials. Two-way plugs with PTFE lining up to DN 100 / NPS 4 available

Recommendation for three-way valves type F-3-S with vertical outlet (longer life-time compared to type F-3-W with horizontal outlet)

### Options


Plugs made of special materials or special designs, e.g. with flushing devices, vent holes in plug bottom or plug upstream / downstream side

2-way	Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°
	<b>D</b> 				
<b>Type F-2-ISO-STANDARD</b>	<b>T4 *</b> 				





















Type F-2-ISO-STANDARD-A

\*) For highly expanding media AZ recommends the "i-plug" (relief hole and open plug bottom)



# Plug types: 3-way valve for STANDARD and EXTRA design

Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°	3-way (vertical)
<b>L</b> 					 Type F-3-S-ISO-STANDARD
<b>LL</b> 					
<b>IL*</b> 					 Type F-3-S-ISO-STANDARD-A
<b>TT</b> 					

Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°	3-way (horizontal)
<b>T4</b> 					 Type F-3-W-ISO-STANDARD
<b>L4</b> 					 Type F-3-W-ISO-STANDARD-A

\*) for EXTRA valves with IL-plug, F-3-W-EXTRA with T4-plug is recommended (higher flowrate)  
Lined valves: the IL-plug is only available in special materials

# Plug types 3-way (120°) valves and 4-way valves for STANDARD and EXTRA design

**3-way (120°) type 3-W-120:**

- min. cross section guaranteed (switching phase)
- piggable execution on request
- minimum flow guaranteed

**transflow design**

**3-way (120°) type 3-WP-120**

- with positive overlap
- flow interruption / isolation





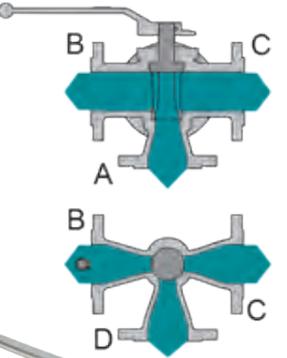
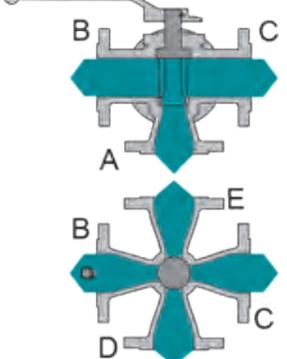
















**positive overlap**

3-way (120°)	Plug type	Pos. I = 0°	Pos. II = 120°	Pos. III = 240°	
	<b>L120</b> 				

4-way	Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°
 Type F-4-ISO-STANDARD  	<b>L4</b> 	 ✓ B-E ✗ C-D	 ✗ B-D ✓ C-E	 ✗ B-E ✓ C-D	 ✗ C-E ✓ B-D
	<b>T4</b> 	 ✗ D ✓ B-C-E	 ✗ B ✓ C-D-E	 ✗ E ✓ B-C-D	 ✗ C ✓ B-D-E
	<b>LL4</b> 	 ✓ B-E + C-D	 ✓ B-D + C-E		

open  
 closed

# Plug types 4-way (special) and 5-way valves for STANDARD and EXTRA design

Plug type	Pos. I = 0°	Pos. II = 90°	Pos. III = 180°	Pos. IV = 270°	4-way (special) / 5-way
<b>L</b> 	 A B C ✓ A-B ✗ C-D-E	 A B C ✓ A-E ✗ B-C-D	 A B C ✓ A-C ✗ B-D-E	 A B C ✓ A-D ✗ B-C-E	 Type F-4-Special-ISO-STANDARD   Type F-5-ISO-STANDARD 
<b>LL</b> 	 A B C ✓ A-B-E ✗ C-D	 A B C ✓ A-C-E ✗ B-D	 A B C ✓ A-C-D ✗ B-E	 A B C ✓ A-B-D ✗ C-E	
<b>IL</b> 	 A B C ✓ A-E + B-C ✗ D	 A B C ✓ A-C + D-E ✗ B	 A B C ✓ A-D + B-C ✗ E	 A B C ✓ A-B + D-E ✗ C	
<b>T</b> 	 A B C ✓ A-B-C ✗ D-E	 A B C ✓ A-D-E ✗ B-C	 A B C ✓ A-B-C ✗ D-E	 A B C ✓ A-D-E ✗ B-C	
<b>TT</b> 	 A B C ✓ A-B-C-D ✗ E	 A B C ✓ A-B-D-E ✗ C	 A B C ✓ A-B-C-E ✗ D	 A B C ✓ A-C-D-E ✗ B	

 open  
 closed



## AZ plants

### Headquarters Germany

AZ Armaturen GmbH  
Waldstrasse 7  
D-78087 Moenchweiler  
Phone: +49 / 7721 / 7504-0  
sales@az-armaturen.com  
www.az-armaturen.com

### Plant Brazil

AZ Armaturen do Brasil LTDA.  
Av. Osvaldo Berto, 600  
CEP 13255-405 Itatiba - SP  
Phone: +55 / 11 / 452499-50 / -51  
az@az-armaturen.com.br  
www.az-armaturen.com.br

### Plant China

AZ Armaturen (Taicang) Co., Ltd.  
No. 1 Zhengzhou Road  
215400 Taicang City  
Phone: +86 / 512 / 53667600  
info@az-armaturen.cn  
www.az-armaturen.cn

### Plant South Africa

AZ Armaturen South Africa PTY LTD.  
28 Derick Coetzee Street  
Boksburg 1459  
Phone: +27 / 11 / 397 3665  
sales@az-armaturen.co.za  
www.az-armaturen.co.za

### Plant USA

AZ VALVES North America L.P.  
18702 Intercontinental Crossing Drive  
Houston, TX 77073  
Phone: +1 / 832 / 827 2163  
sales@azvalves.com  
www.azvalves.com

## AZ services

### Europe

- Germany (Moenchweiler & Rhineland)
- France (Lyon/ Bourg-lès-Valence)
- Great Britain (York/Roecliffe)
- Italy (Milan/Caltignaga)
- Poland (Warsaw/Opoczno)
- The Netherlands (Amsterdam)
- Russia (St. Petersburg)

### America

- USA (Houston/TX)
- Brazil (São Paulo, Itatiba & Belem)
- Chile (Santiago de Chile)
- Mexico (Mexico-City)
- Peru (Lima)

### Asia

- China (Taicang)
- South Korea
- Thailand (Rayong)
- Vietnam (Hanoi)

### Africa

- South Africa (Johannesburg)



Detailed addresses  
on our website

[www.az-armaturen.com](http://www.az-armaturen.com)